



Enerdrive
DRIVING YOUR ENERGY NEEDS

POWER SYSTEM SERIES

ARCHIE

Installation Guide

K-ARCHIE



Congratulations on the purchase of your Archie power system from Enerdrive. This all-in-one system was designed for those who want the best charging, power supply and monitoring package in one compact portable package. Your system includes the following individual products:

- Enerdrive 12V 100AH eLITE Lithium Battery (Optional 12V 125AH B-TEC Lithium Battery)
- Enerdrive DC2DC40+ DC Battery Charger with Blue Anderson vehicle charge input and Red Anderson solar charge input.
- Enerdrive ePOWER 600W Inverter
- Enerdrive ePRO PLUS Battery Monitor
- 2 x Twin USB Outlets, 3 x DC Outlets, 2 x 50A Anderson Style Outlets

Mounting

- Consideration must be given to avoid moisture and excessive dust.
- If you choose to fix Archie into a semi permanent location use the supplied mounting brackets.
- Slide each bracket into the slots located on the front and back of Archie.
- Use appropriate fasteners for the material the brackets will be fastened into. It is recommended where possible use a bolt and nut (nutsert or similar) especially if you are planning on frequent removal.
- The two handles on Archie can be removed to reduce overall height when used in installed applications.
- Alternatively you can use 2 x tie down straps over the Archie, run from side to side.

Mounting Bracket & Fasteners



Caution: Ensure any debris from the mounting process is thoroughly removed to prevent damage to equipment or wiring.

Caution: Ensure that there is adequate spacing for wiring and be sure to check no wiring is in the path of fasteners when mounting the power system.

Connecting Loads (Appliances)

Archie is designed as a portable/fast install system therefore has the following outlets allowing you to connect various DC and AC equipment.

- 2x 50 Amp Anderson (1 Front, 1 Rear), protected by the "ANDOS" circuit breaker.
- 2x Twin USB 2.4A Hi Amp Sockets, protected by the "USB Outlets" circuit breaker and controlled by the "Outlets" circuit breaker.
- 3x 12V DC Power Outlets, 2 on the front, 1 on the rear, protected by the "DC Outlets" circuit breaker and controlled by the "Outlets" circuit breaker.
- 1x 230V AC outlet supplied from the 600W true sine wave inverter, protected and controlled by the "Inverter" circuit breaker. Inverter also has internal over load protection.

Always ensure you use the appropriately rated socket for based on the current draw of your appliance being connected.

Push to Reset Breakers (located on the front)




Main Breakers (located on the back)



Solar Connection

- Using a genuine "red" Anderson plug, connect your unregulated solar panels directly into Archie. Use of portable folding panels are recommended when Archie will be used in a portable application. When installed in a vehicle the use of fixed panels may be preferred. Refer to the Specifications table for maximum solar panel rating.

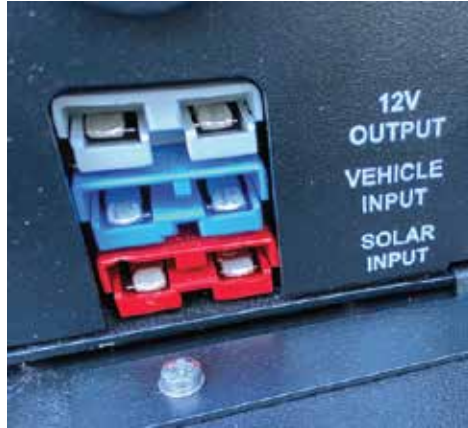

Connecting to Main (Start) Battery

- Using the optional Vehicle Charge Cable Kit connect the lug end to your main/start battery. The supplied 70A midi fuse must be located as close as possible to the main/start battery. Connect the "blue" Anderson plug on the cable kit to the "blue" Anderson Vehicle Input plug. This input is protected by the "DC2DC" circuit breaker on the rear.
- If you select to run your own cabling connect a genuine "blue" Anderson plug to the end Archie will be installed. Connect the other end to you main/start battery. A 70A midi fuse located as close as possible to the main/start battery is required. Refer below cable sizing chart.

DC2DC Connection Inputs	Require Length & Battery Cable Size		
	2 Meters to 5 Meters (2)	Up to 10 Meters (2)	Greater than 10 Meters
DC2DC set to 50A Output			
From Start Battery	6-16mm ² @ 12vdc / 4-8mm ² @ 24vdc	16-35mm ² @ 12vdc / 8-16mm ² @ 24vdc	Not Recommended



Note: Refer to DC2DC manual for information on wiring for vehicles with smart alternators.

Battery Reset

Archie is fitted with a Battery Reset switch. This allows a flat battery to be "jump started" from the main/start vehicle battery, when connected.

1. Turn off ALL DC and AC loads
2. Ensure the "DC2DC" circuit breaker on the back of Archie is turned on.
3. Ensure the blue "Vehicle Input" plug is connected to Archie and the vehicle is running.
4. Hold the green "Reset" button on the back of Archie for 5-10 seconds.
5. Release and wait 10seconds
6. Power should now be restored and charging will commence
7. When the SOC (State of Charge) is above 20%, loads can be switched on if required

Battery Reset Button




Storage

If you will not be using your Archie system for more than a week and will not be connected to vehicle or solar charge it is recommended to turn off the 4 circuit breaker panels on the rear of Archie. This will reduce standby current draw.

Breakers



Archie - Enerdrive Wiring

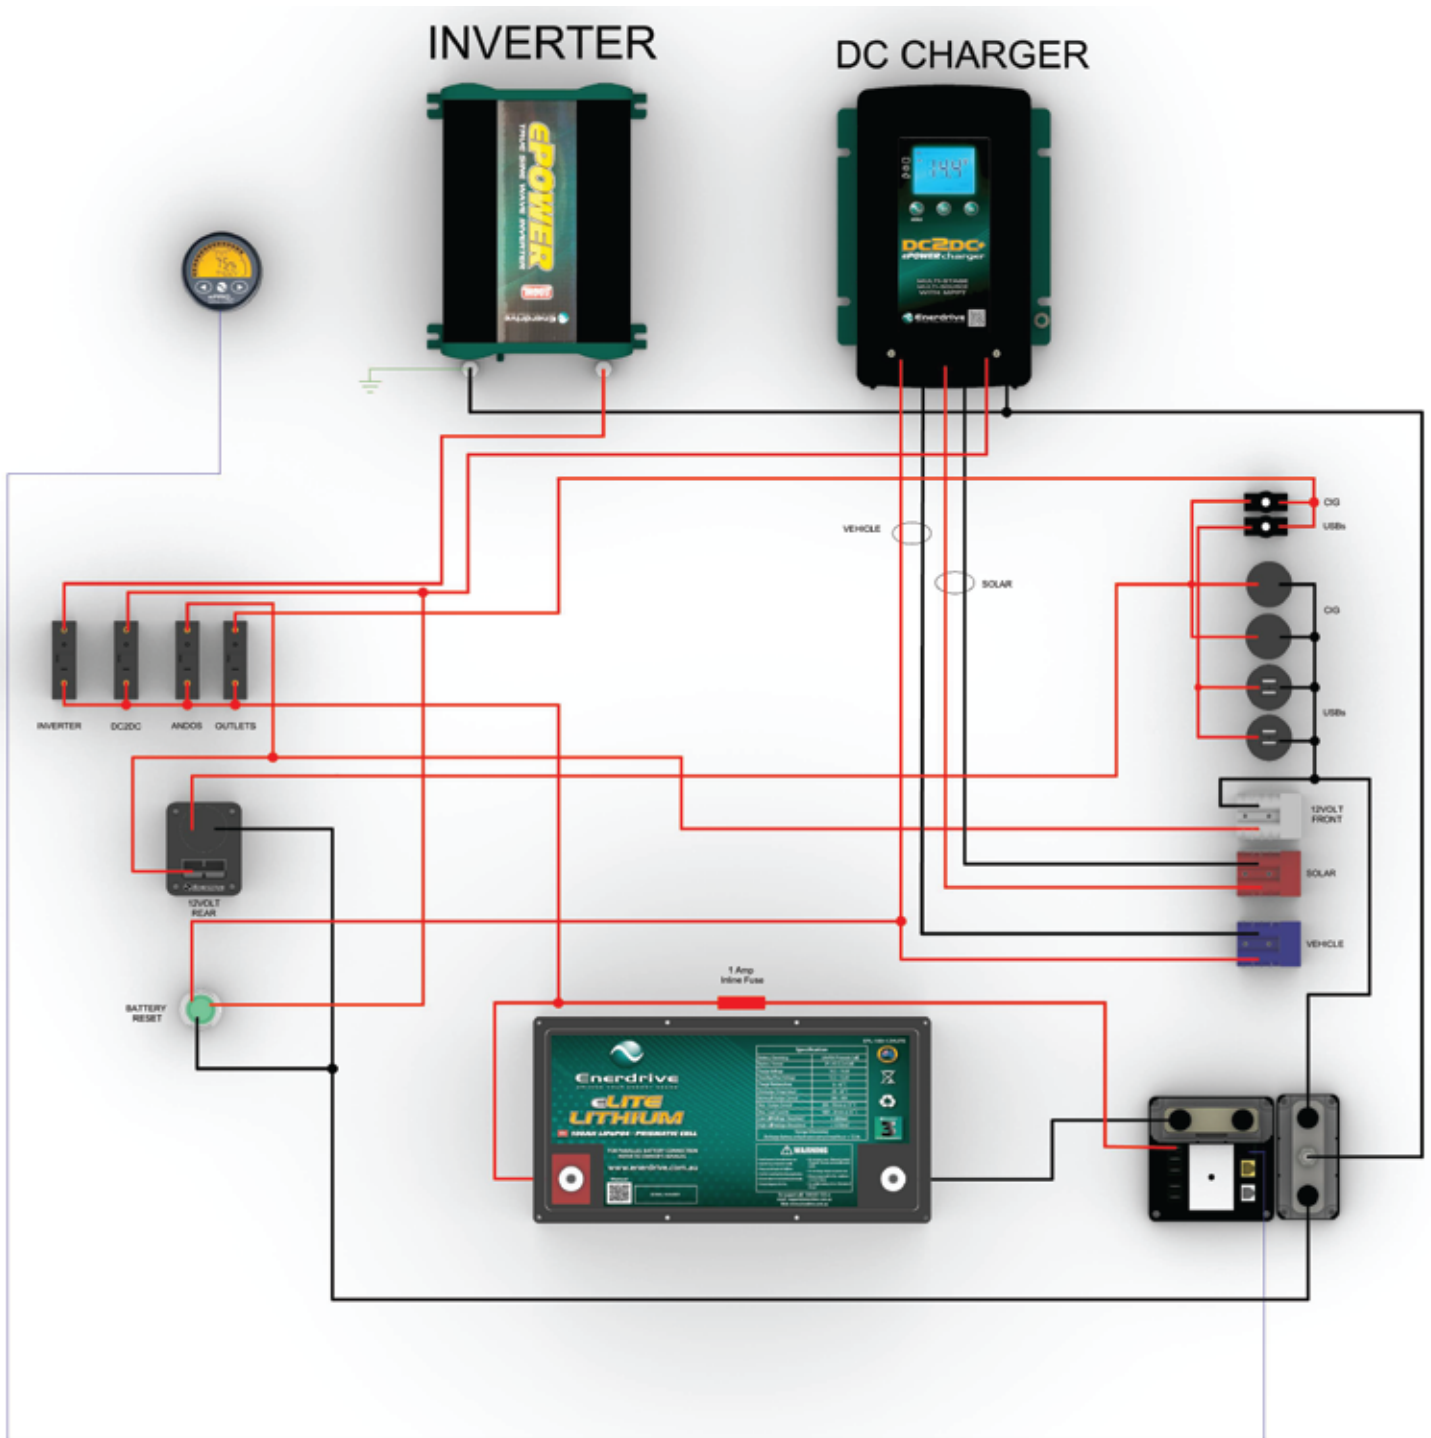

This wiring diagram is only a representation on how the wiring is done and may not fully reflect exactly how your system is wired.

Archie - Capabilities



Portable Refrigerator



Battery Charger



Mobile Phone



Vehicle Start Battery



GoPro



Air Compressor



240W Folding Solar Panel Kit

Specifications		
DC Charger	Output Current Maximum: 40~50A	
	Solar Input Voltage: 14.5-45VOC	
	Solar Wattage Maximum: ≤23V Input, 500W (600W allowable), ≥37.5V-45V Input, 750W (800W allowable)	
Inverter	AC Output: 230V 50Hz	
	AC Output Power: 600W Cont (900W Surge)	
Battery	Standard - 12V 100Ah LiFeP04	
	Optional - 12V 125Ah LiFeP04 with Bluetooth monitoring	
General	Dimensions	470L x 265W x 415H (without brackets)
		490L x 265W x 415H (with brackets)
	Weight	25.0KG (with 100Ah eLITE)
		28.0KG (with 125Ah B-TEC)



5 Year Warranty

In the unlikely event that a technical issue arises with an Enerdrive product, customers are encouraged to initially contact the Enerdrive Support Team on 1300 851 535 or support@enerdrive.com.au for immediate and efficient expertise and first class product support.

Important Note: Consumer Protections

If you have purchased your product in Australia, you should be aware that:

This warranty is provided in addition to other rights and remedies held by a consumer at law. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Enerdrive warrants that its Products will be free from defects in materials and workmanship (subject to limits, and in normal conditions, as described in the complete Enerdrive Warranty Policy) for up to 5 years from the date of purchase.

For full terms, conditions and claim process, refer to the Enerdrive website.
<https://enerdrive.com.au/warranty/>



ENERDRIVE PTY LTD

P.O. Box 9159, Wynnum Plaza, Queensland, Australia 4178

Ph: 1300 851 535 / Fax: 07 3390 6911

Email: support@enerdrive.com.au

Web: www.enerdrive.com.au